

Finger Joystick Series 826




- Outstanding quality of mechanics and sensors
- 1 to 2 axes
- For demanding applications
- Conductive plastic potentiometers or hall sensors on the outside of the housing
- Various configuration options for switches, latching positions, etc.
- Protection class up to IP66 above panel on request
- Optionally redundant (dual-ganged potentiometers)
- Optionally with current output

The 826 series joysticks are ideal for demanding applications with up to two axes, where quality, durability and reliability are paramount and the sensor technology has to meet special requirements.

The mechanically separate shafts for the two axes allow special adaptations to be made: For example, detent points can be realized and a friction brake can be installed. In addition, up to 6 microswitches can be mounted on the outside of the housing.

Technical Data Joystick	
Angle of Movement X+Y Axis	±30° to ±35°
Return to Center Accuracy X+Y Axis	±1°
Operating Force X+Y Axis	3 to 15 N
Lifetime	typ. 5 million cycles
Vibration 10 bis 55 Hz, 1 min.	10 G (MIL-STD-202F-204)*
Shock	30 G (MIL-STD-202F-213)*
Protection Grade (above panel)	IP54, IP65 (rubber boot must be glued after installation), or IP66
Operating Temperature	-20°C to +65°C
Weight	ca. 350 g*
Panel Thickness	max. 3.2 mm

^{*} only valid for potentiometer version without USB and current converter

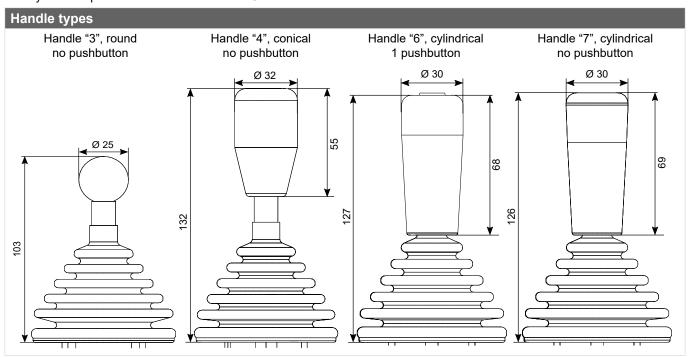



Finger Joystick Series 826

Please contact us for information regarding stock articles, delivery times and minimum order quantities.

Order Code										
Description	Se	election	: stand	ard= bl	ack/bo	l d , poss	ible op	tions=g	rey/ital	ics
Series	826									
Axes: 1 Axis 2 Axes 2 Axes with pushbutton 1 Axis with pushbutton		1 2 3 6								
Sealing: Rubber boot			5							
Return Mechanism: Spring return No spring return Friction clutch, with detent in center position Friction clutch, w/o detent				1 2 5 6						
Handle versions: Ball-Tip, Ø25 mm Cylindrical handle, with pushbutton, Ø30 mm Cylindrical handle, without pushbutton, Ø30 mm Conical handle, Ø32 mm					3 6 7 4					
Trim function: w/o trim with trim function(1)						1 3				
Sensor type/output interface: Potentiometer type F / unwired, output 0 to 100 % Potentiometer type F / USB HID-compliant game continuous potentiometer type F / USB HID-compliant mouse emit Hall sensors, voltage output 0.5 to 4.5 V, supply 5 VDC	ulation	ed					4 5 6 H			
Limiter: Round Square Single axis Y X-/Y-Axis plus, "+"								0 1 8 9		
Micro switches: none Common center detect switch X-/Y-Axis (3) Separate center detect switches (for 2 axes) Switches ON @ ±3°, X-/Y-Axis Switches ON @ ±3°, center detect, X-/Y-Axis Switches ON @ ±5°, 1 or 2 axes Switches ON @ ±5°, center detect, X-/Y-Axis									0 1 2 4 5 6 7	
Additional options: Mounting plate Sealed to IP65 Sealed to IP66 with mounting plate (rubber boot glued Potentiometer with center tap (4) Output 420 mA, converter integrated in cable outlet, s										M IP MIP66 CT 2442

⁽¹⁾Only possible if potentiometers are selected as sensors

For higher quantities or on-going demand, additional options are available

For example:

- Specific configuration of the two axes
- Combinations of micro switches
- Customer-specific cable and handles


⁽²⁾ The output must be connected with a load resistance of 500 Ohm


⁽³⁾ Code also applies to 1-axis variant

⁽⁴⁾ Not available for versions with current output, USB



Finger Joystick Series 826

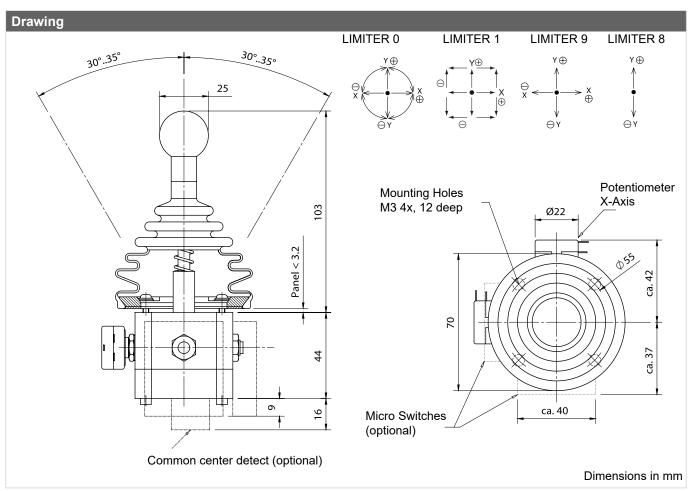

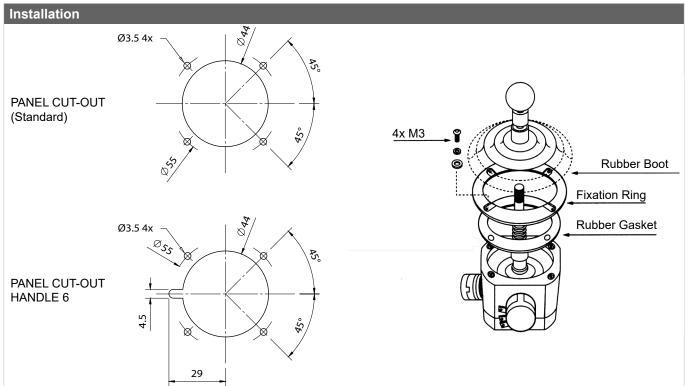



Finger Joystick Series 826


Pushbutton & Micro Switches

The 826 series joysticks offer the option of integrating microswitches for deflection-dependent switch actuation. Three different angles can be defined per axis, e.g. one switch to detect the centre position of the joystick handle plus one switch each at +10° and -10°. Due to the large number of different combinations we cannot give a complete list of order codes. We recommend that you contact us personally to determine the optimum solution for your needs.

Technical Data	Pushbutton (handle 6)	Micro Switch	Center Detect
Voltage / Current (max.)	50 VAC / 6 A	50 VAC / 5 A	30 VDC / 100 mA
Lifetime (typ.)	25000	200000	100000


SCHEME (Standard) of deflection-dependent switch actuation

e.g. "Switches ON @ ±3°, X-/Y-Axis" (many other combinations can be realized).

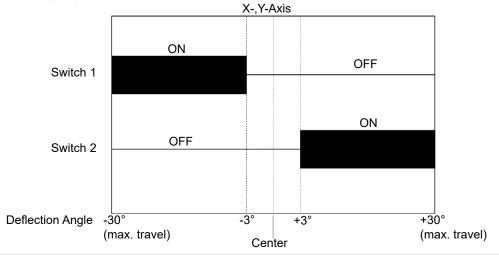

Trim Option "3"

Using the Trim function, potentiometers can repeatedly be adjusted ("trimmed") to an individual zero position.




Technical Data Potentiometer Type	F		
Technology	Conductive plastic		
Nominal Total Resistance	10 kOhm		_
Resistance Tolerance	±15%	1	3
Independent Linearity	±3%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	^○
Power Rating @ 40°C	0.15 W	—————————————————————————————————————	
Effective Electrical Angle of Rotation	60°	X-Axis: +X	
max. Wiper Current	1 mA	Y-Axis: +Y	



Finger Joystick Series 826

Technical data Hall sensor	option H	5V —	
Supply voltage	5 VDC ±10%	4.5V±0.15V	< -
Current consumption	ca. 6 mA	(90%±3%)	
Output signal	0.5 to 4.5 V (0 to 5 V for option H0505)	2.5V±0.15V	
Load resistance	> 10 kOhm	(50%±3%)	
Independent linearity	±3%		
Temperature drift output	< ±2,5% U _{out} *FS	0.5V±0.15V (10%±3%)	
Temperature drift center pos.	< 0,5% U _{out} *FS	0V	
Insulation voltage	1 Minute at 250 VAC	I*	< Med
Insulation resistance	> 100 MOhms at 250 VAC	Toward⊖eacl	:h-axis



Technical data Hall ser	Technical data Hall sensor option H2405 (deprecated)					
Supply voltage	24.0 ± 0.5 V					
Current consumption	ca. 16 mA					
Output signal	0 to 5 V					
Electrical connection	Lead wires 0.18 m, black=GND, red = VSUP, white=OUT					
Load resistance	≥ 10 kOhm					
Independent linearity	±3%					
Insulation voltage ±8 kV (contact), ±16 kV (air) (IEC 61000-4-2)						
Insulation resistance > 1000 MOhm at 500 VDC						

Technical data Hall sensor option H2442 (deprecated)				
Supply voltage	24.0 ± 0.5 V			
Output signal	4 to 20 mA			
Load resistance	≤ 500 Ohm			
Independent linearity	±3%			
Insulation voltage	±8 kV (Kontakt), ±16 kV (Luft) (IEC 61000-4-2)			
Insulation resistance	> 1000 MOhm at 500 VDC			

Limiters							
	Square	- Option	"1"	ţ	1-axis "Y"	- Option	"8"
	Round	- Option	"0"		X/Y Plus "+"	- Option	"9"



Finger Joystick Series 826

USB specifications (sensor/output options 5 and 6)

Supply voltage 5 V (via USB type A connector)

USB version: 2.0

Operating systems: Windows 7, Windows 8.1, Windows 10, Linux depending on kernel configuration

Cable (included) USB cable (length approx. 198 cm) with USB type A plug

Attached to the joystick body is the PCB for the USB interface. There is no IP protection for the PCB. Power is supplied to the joystick via the interface cable. Most Windows and Linux versions recognize the device without additional drivers.

There are two different configurations of the joystick available according to the datasheet:

USB HID-compliant game controller (option 5)

The device identifies itself on the USB bus as a USB 2.0 HID-compliant game controller, i.e. as a joystick. The axis resolution is 10 bits.

USB HID-compliant mouse emulation (USB joystick as a mouse replacement, option 6)

Optionally, the joystick can also be operated as a mouse replacement. In this case, the device identifies itself on the USB bus as a USB 2.0 HID-compliant mouse. The X and Y axes are converted in the movement of the mouse pointer on the screen. Button 1 is a left mouse button, button 2 as right mouse button. Linux is not supported.

Technical data current converter VIC (additional option 2442)				
Supply voltage	12 to 24 V			
Current consumption	Maximum consumption <100 mA, Consisting of: 1) Basic consumption voltage transformer 40 mA + 2) sum of currents per channel (420 mA, max. 30 mA) + 3) consumption joystick (max. 30 mA)			
Output signal	4 to 20 mA (max. 3 channels)			
Operating temperature	-20°C to +60°C			
Independent Linearity	< ±1% (note: this is added to the one of the mechanics and the sensor)			
Temperature-dependent drift	< ±0.01%/°C			
Insulation resistance	> 1000 MOhm at 500 VDC			
Terminating resistor	25 to 50 Ohm (Attention: this resistance must be provided by the customer!)			

The current transformer is a separate electronics box that can be ordered as an extension to the joystick. The converter supplies the sensor of a joystick with voltage and converts the voltage signal (0-5V) of the joystick into a current signal of 4 to 20 mA. The current transformer can provide up to 3 analogue signals as current outputs, while the joystick 829 offers up to two channels. It is equipped with a Molex connector type 43650-0501. The converter box can be mounted by the customer using two M3 screws (see drawing for details). Tensile loads on the converter connections must be avoided.

Immunity (additional option 2442)					
Port	Disturbance type	EMC Specification	Test Level		
Housing	ESD	IEC 61000-4-2	4 kV Contact / 8 kV Air		
Housing	Conducted Sinus Wave	IEC 61000-4-3	3 V/m 80 MHz - 6 GHz		
DC Power	BURST	IEC 61000-4-4	1 kV (5 kHz)		
DC Power	Conducted Sinus Wave	IEC 61000-4-6	3 V (150 kHz-80 MHz)		
1/0	BURST	IEC 61000-4-4	1 kV (5 kHz)		
I/O	Conducted Sinus Wave	IEC 61000-4-6	3 V (150 kHz-80 MHz)		


Emission (additional option 2442)					
Port	Disturbance type	EMC Specification	Class		
AC/ DC Power	Emission	CISPR 55011	В		
Housing	Emission	CISPR 55011	В		

MEGATRON Elektronik GmbH & Co. KG • Hermann-Oberth-Strasse 7 • 85640 Putzbrunn / Munich Tel.: +49 89 46094-0 • www.megatron.de • info@megatron.de

Date: 15.10.2025 Page: 6 von 7



Finger Joystick Series 826

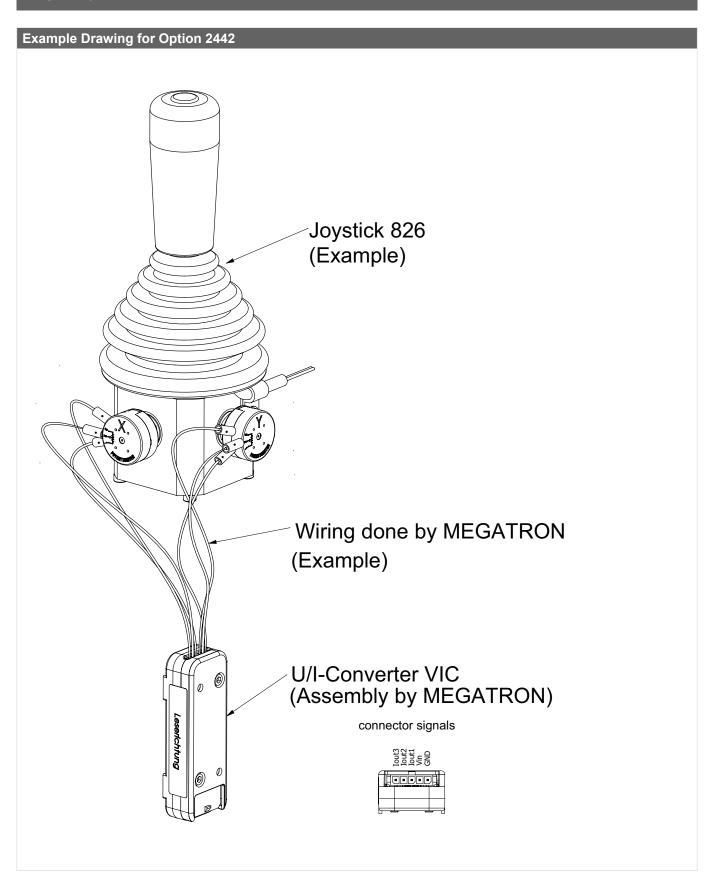

15.10.2025

Date: