

Data Sheet for Linear Sensors

Inductive Linear Transducer (LVDT) with integrated amplifier

Series EDC



- Good accuracy for small measuring strokes (2..50 mm)
- Cost-effective design
- Operational Temperature 0...60°C
- Protection grade IP40
- Integrated electronics
- Supply voltage 24 V
- Analogue output signals: 0..10 V / 0..20 mA / 4..20 mA

The EDC series is available in two designs.
EDCT as probe with external spring device and
EDCL with loose push rod

Electrical Data	EDC-2	EDC-10	EDC-20	EDC-50
Effective electrical travel 1.)	±1 mm	±5 mm	±10 mm	±25 mm
Linearity error	±0.75% F.S.			
Output signal	0..10 V / 0..20 mA / 4..20 mA			
Limit frequency	100 Hz			
Supply voltage	24 V ±5 %			
Power consumption (no load)	≤50 mA (< 70 mA @ current output)			
Output load	> 10 kOhm (voltage output) / <500 Ohm (current output)			
Temperature coefficient	±0.4 % F.S./10K			
Ripple	< 20 mV RMS			

Mechanical Data, Environmental Conditions, Miscellaneous	EDC-2	EDC-10	EDC-20	EDC-50
Operational temperature	0°C up to +60 °C			
Storage temperature	-30 °C up to +80 °C			
Protection grade (IEC60529)	IP40			
Vibration (IEC 68-2-6, Test Fc)	10 g (2..2000 Hz)			
Shock (IEC 68-2-27, Test Ea)	100 g, 2 ms			
Sensor length	76 ±1 mm	101 ±5 mm	140 ±10 mm	185 ±25 mm
Mass	ca. 85 g	ca. 120 g	ca. 175 g	ca. 240 g
Material housing	Steel nickel plated / polyamide PA6 (back cover)			
Material push rod	Stainless steel (Mu metal)			
Electrical connection	plug 5-pin (M9)			
Mounting parts (included in delivery)	Probe (EDCT), loose push rod (EDCL)			

1.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Data Sheet for Linear Sensors

Inductive Linear Transducer (LVDT) with integrated amplifier

Series EDC

Order Code

Description	Selection: standard=black/bold , possible <i>options=grey/italic</i>					
Series:	EDC					
Design: Probe with spring return With loose core		T L				
Effective electrical travel:						
2 mm			2			
10 mm			10			
20 mm			20			
50 mm			50			
Electrical connection: Plug 5-pole				S		
Supply voltage 24 V					24	
Output signal:						
0..20 mA						20
0..10 V						10
4..20 mA						42

Accessory (not included in delivery):

- Mating connector (STEM9) #111727: M9 thread, 5-pole, IP67, straight, not shielded (STE M9 5POL IP67 G NS)
- Mating connector (STEM9) #111835: M9 thread, 5-pole, IP67, angled, not shielded (STE M9 5POL IP67 W NS)
- Mounting bracket #106656: take a look at drawing in document
- Mounting flange #135132: take a look at drawing in document
- Extension for armature (50..315 mm) - take a look at drawing in document

More connectors with and without cable on request. Take a look at data sheet STEM9 for connector without cable or STKM9 for connector with cable.


For higher quantities or on-going demand, additional options are available as described below on request

For example:


- Cable assemblies with and without connector
- Special probe, special axis length and much mores
- Extended operation temperature range (-25°C .. +85°C)

Drawing sensor


EDCT

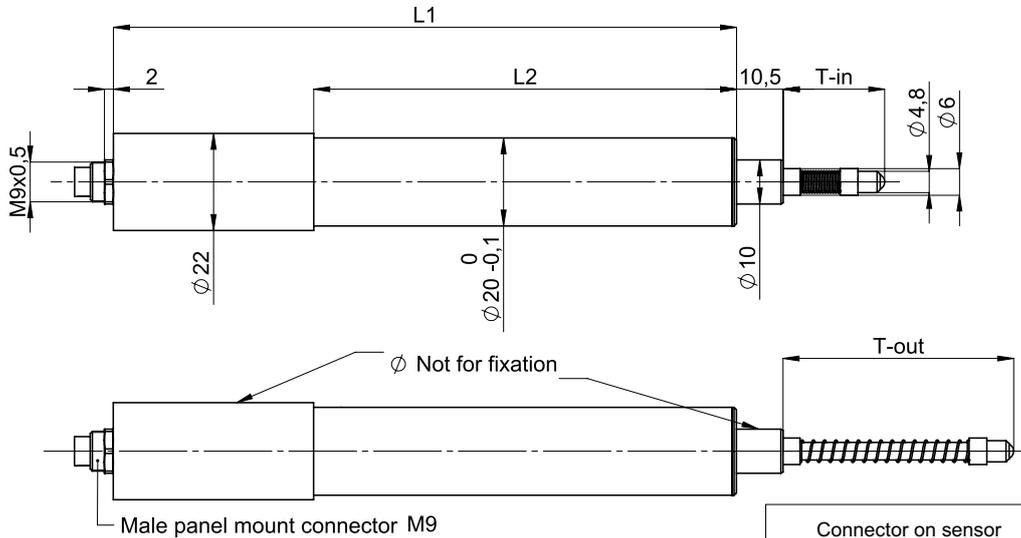

Dimensions [mm]	EDCT2	EDCT10	EDCT20	EDCT50
Effective electrical travel	±1	±5	±10	±25
L1 (housing length)	76	101	140	185
L2 (mounting length)	31	56	95	140
L T-in	27	23	23	28
L T-out	42	47	52	82

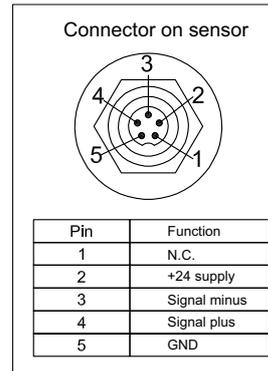

EDCL

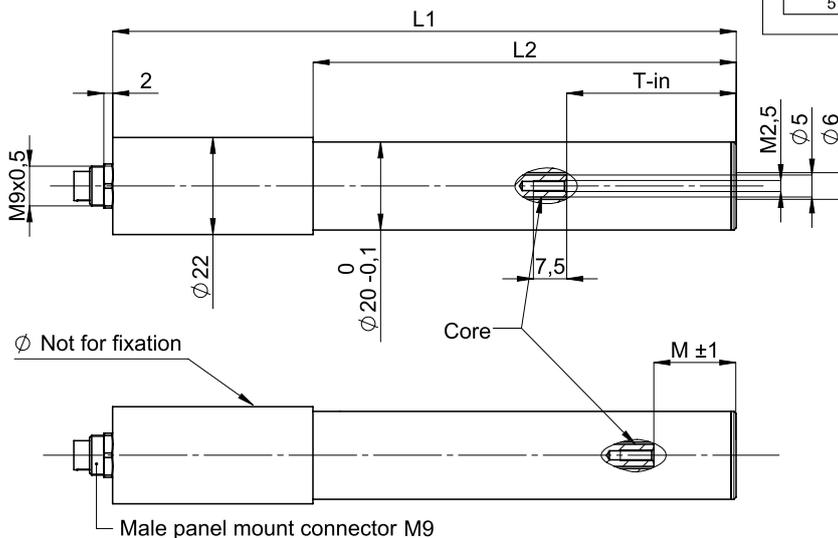

Dimensions in mm

Dimensions [mm]	EDCL2	EDCL10	EDCL20	EDCL50
Effective electrical travel	±1	±5	±10	±25
L1 (housing length)	76	101	140	185
L2 (mounting length)	31	56	95	140
L T-in	19	31	38	65
M (middle position)	9	15	18,5	32

Drawing mounting bracket

