

Data Sheet for Linear Sensors

Potentiometric Linear Transducer (Conductive Plastic)

Series HEM12



Displacement sensor for hydraulic applications

- High degree of protection IP67 and max. 250 bar operating pressure
- With external magnetic drag - capsule of the sensor element
- Mounting via internal or external flange
- Measuring lengths from 50 mm to 1000 mm
- Long lifetime (100 million movements)

The sensors are designed for operating pressures of max. 250 bar with peaks of 400 bar. The mechanical detection of linear movement is done by a magnetic drag.

Electrical Data

| | |
|--|---|
| Effective electrical travel (+1/-0 mm) 1.) | 50 / 100 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 / 550 / 600 / 750 / 800 / 850 / 900 / 950 / 1000 |
| Total electrical travel (± 1 mm) 1.) | 50 / 100 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 / 550 / 600 / 750 / 800 / 850 / 900 / 950 / 1000 |
| Total resistance 1.) | 5 kOhm (50..300 mm) / 10 kOhm (350...600 mm) / 20 kOhm (750..1000 mm) |
| Resistance tolerance | ± 20 % |
| Independent linearity (best straight line) 1.) | ± 0.35 % |
| Theoretical resolution 1.) | Almost infinite |
| Backlash (Hysteresis) 1.) | ≤ 0.25 mm |
| Max. / recommended wiper current 1.) | 10 mA (@40 °C, 1 min in case of failure) / < 1 μ A |
| Power rating @40 °C (0 W @120 °C) | ≤ 1 W (50 mm) / ≤ 2 W (100 mm) / ≤ 3 W (150..1000 mm) |
| Isolation voltage 1.) | < 100 μ A@500 VAC, 1bar, 2s |
| Isolation resistance 1.) | 1000 MOhm@500 VDC, 1bar, 2s |

Mechanical Data, Environmental Conditions, Miscellaneous

| | |
|---|---|
| Mechanical stroke (+5 mm) 1.) | 50 / 100 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 / 550 / 600 / 750 / 800 / 850 / 900 / 950 / 1000 |
| Lifetime (90 % effective electrical travel) 2.) | > 25 million meters or 100 million movements (the smaller value applies) |
| Max. operational speed | ≤ 5 m/s |
| Max. acceleration | ≤ 10 m/s ² |
| Operational force @ RT 1.) 2.) | < 0.5 N |
| Operational temperature | -30 °C up to +100 °C |
| Storage temperature | -50 °C up to +120 °C |
| Protection grade (IEC60529) | IP67 |
| Vibration (IEC 68-2-6, Test Fc) | 20 g (5..2000 Hz, 0,75 mm) |
| Shock (IEC 68-2-27, Test Ea) | 50 g, halvesine, 11 ms |
| Housing length (+94.7 mm) | 50 / 100 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 / 550 / 600 / 750 / 800 / 850 / 900 / 950 / 1000 |
| Included in delivery | 1 x magnetic cursor (O-ring for internal flange included / no O-ring for external flange) |
| Material housing | Steel AISI 304 |
| Connection type | PUR-Cable 3-pole shielded 1 m (\varnothing Leads: 3 x 0.14 mm ²) |

Data Sheet for Linear Sensors

Potentiometric Linear Transducer (Conductive Plastic)

Series HEM12

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

| Order Code | | | |
|--------------------------------------|---|-------------|------------|
| Description | Selection: standard=black/bold , possible <i>options=grey/italic</i> | | |
| Series: | HEM12 | | |
| Effective electrical travel: | | | |
| 50 mm | | 50 | |
| 100 mm | | 100 | |
| 150 mm | | 150 | |
| 200 mm | | 200 | |
| 250 mm | | 250 | |
| 300 mm | | 300 | |
| 350 mm | | 350 | |
| 400 mm | | 400 | |
| 450 mm | | 450 | |
| 500 mm | | 500 | |
| 550 mm | | 550 | |
| 600 mm | | 600 | |
| 750 mm | | 750 | |
| 800 mm | | 800 | |
| 850 mm | | 850 | |
| 900 mm | | 900 | |
| 950 mm | | 950 | |
| 1000 mm | | 1000 | |
| Construction: | | | |
| Internal flange | | | I |
| External flange | | | E |
| Electrical connection: | | | |
| Standard PUR cable 3-pole 1 m | | | K |
| <i>Option cable length in m</i> | | | <i>Kxx</i> |

For higher quantities or on-going demand, additional options are available as described below on request


For example:

- Cables with / without connector
- Special axis length and much more

Note: When calibrating the linear transducer, be careful to set the stroke so that the output does not drop below 1 % or rise beyond 99 % of the supply voltage.

Installation in cylinder

Installation inside cylinder with intern flange: I

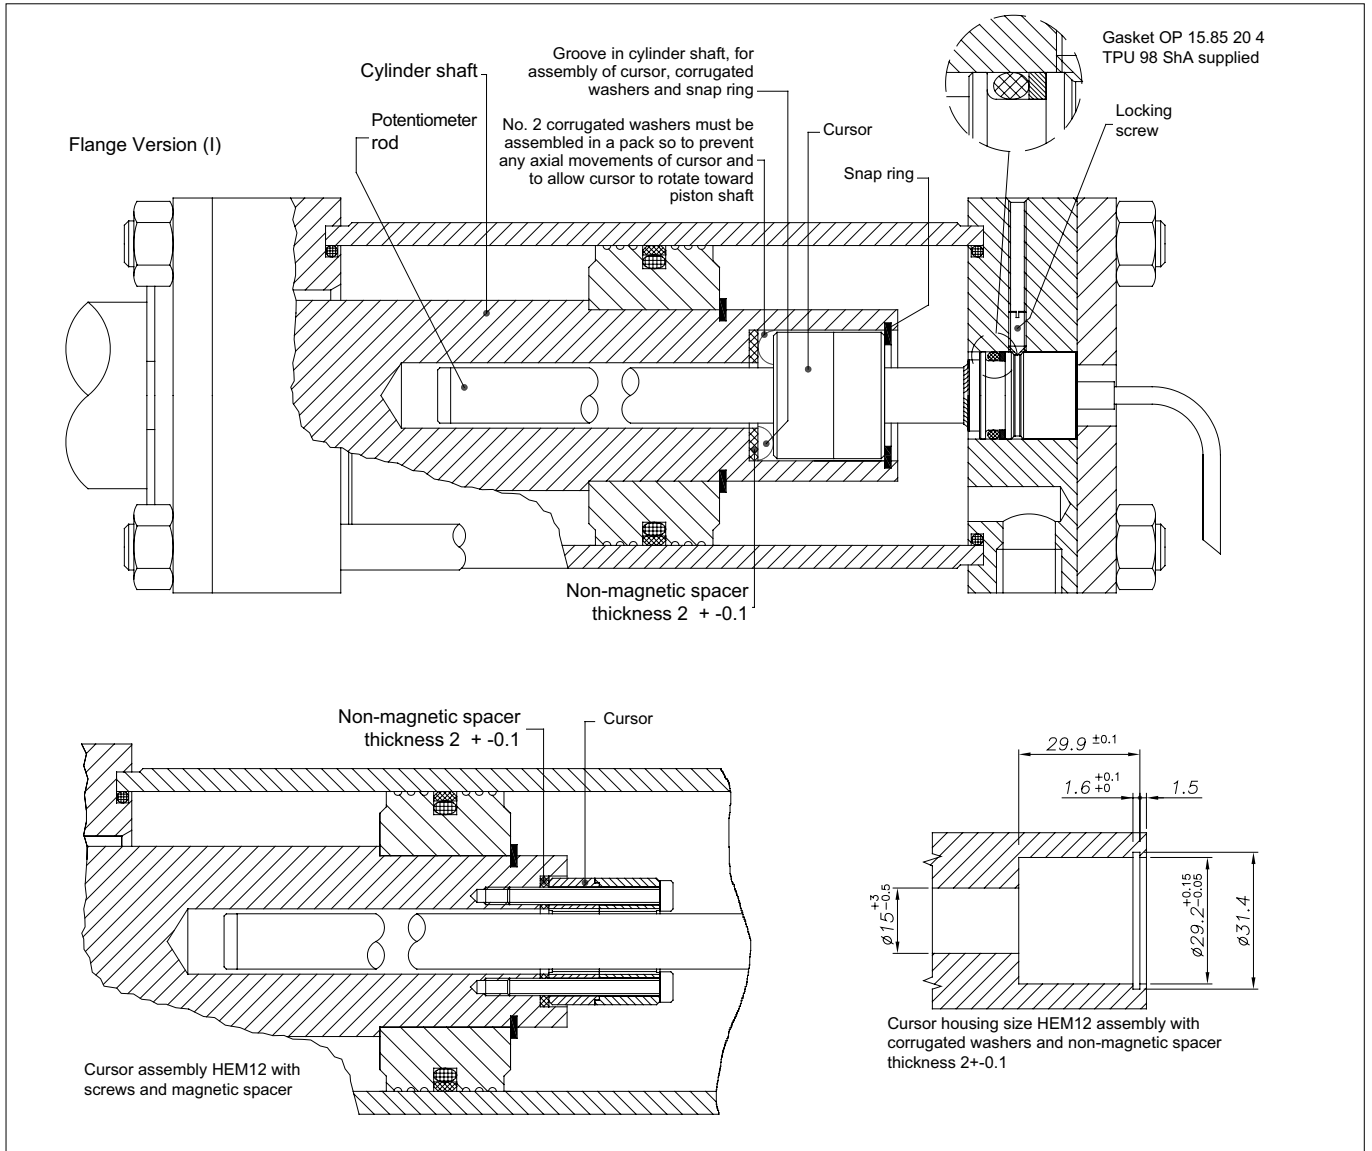

Installation in cylinder

Installation inside cylinder with extern flange: E

