


# Data sheet for Load Cells

## S-Beam Load Cells

## Series KM1403

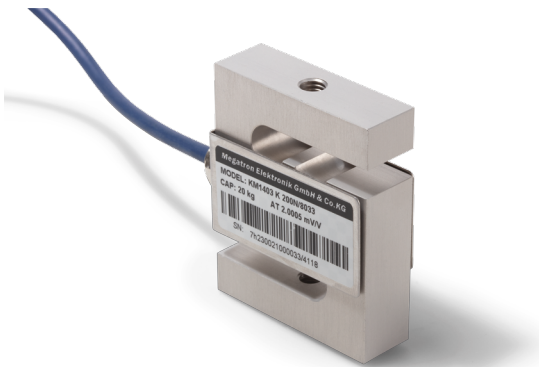

- Strain gauge principle
- Aluminium alloy
- Force transmission via M8-thread for 50N..1kN
- Protection grade IP54
- Easy to install, stable and reliable

Series KM1403 force transducer is a all-purpose S-beam load cell. Suitable for batching systems, industrial scales and package systems, etc.

### Data Load Cell

Rated force	50N, 100N, 200N, 500N, 1kN
Rated characteristic value	2,0 mV/V @ rated force
Relative error of characteristic value	≤ 1 % of F.S.
Relative repeatability error	≤ 0,03 % of F.S.
Relative reversibility error	≤ 0,03 % of F.S.
Relative linearity error	≤ 0,03 % of F.S.
Relative deviation of zero signal	≤ 3 % of F.S.
Rated displacement	≤ 0,3 mm
Input resistance	410 ±5 Ω
Output resistance	350 ±3 Ω
Insulation resistance	≥ 5 GΩ @ 50 VDC
Maximum operating force	≤ 150% of rated force
Rated range of excitation voltage	≤ 10 V DC/AC
Operating range of excitation voltage	≤ 15 V DC/AC
Rated temperature range	-10 °C..+40 °C
Operating temperature range	-10 °C..+70 °C
Protection	IP54
Temperature effect on characteristic value	≤ 0,02 %/10 K of F.S.
Temperature effect on zero signal	≤ 0,02 %/10 K of F.S.
Creep under load	≤ 0,03% of F.S. after 0,5 h @ rated force
Cable dimension	4xAWG26; jacket Ø4,8 mm; screened
Cable length from body	ca. 2,75 m
Body material / cable material	Aluminium alloy / UL-PVC

Terms according to guideline VDI / VDE / DKD 2638

# Data sheet for Load Cells

S-Beam Load Cells

Series KM1403


## Order code

Description	Selection: standard=black/bold, possible options=grey/cursive		
<b>Series:</b>	<b>KM1403</b>		
<b>Connecting cable:</b> <b>Cable length 2,75 m</b>		<b>K</b>	
<b>Rated force:</b> <i>Option 50 N</i> <i>Option 100 N</i> <b>200 N</b> <i>Option 500 N</i> <i>Option 1kN</i>			<i>50N</i> <i>100N</i> <b>200N</b> <i>500N</i> <i>1kN</i>

## Accessories

<b>Measuring amplifier</b>	IMA2 DMS
----------------------------	----------

Drawing

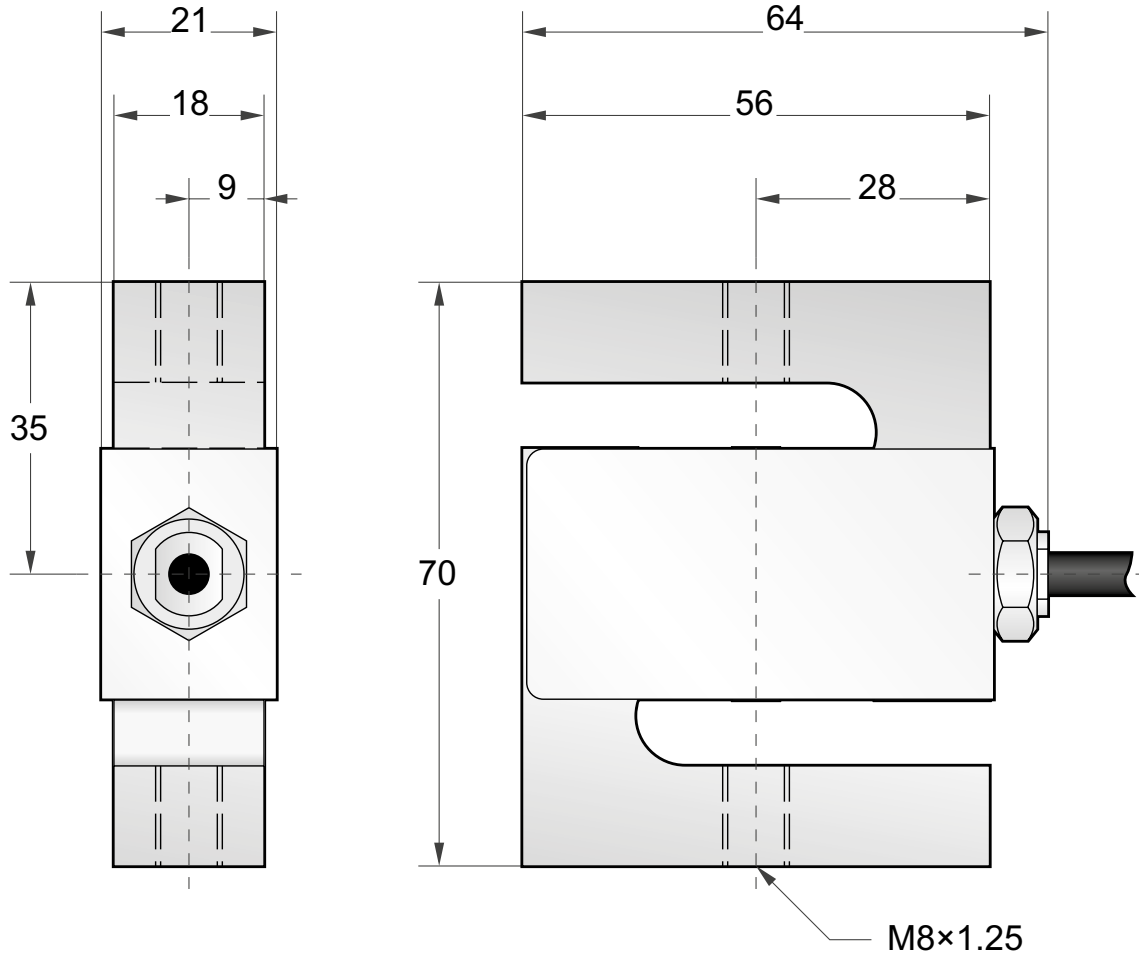

Dimensions in mm

### Cable assignment

For tension:

- Red: +input
- Black: -input
- White: -output
- Green: +output

For pressure:

- Red: +input
- Black: -input
- White: +output
- Green: -output

### Connection diagram tension

