

### Series HTP25K – singleturn, PWM output

#### Key features HTP25K:

- PWM signal output
- Frequency 244 Hz (constant)
- Pulse width (duty cycle) 10% (0°) to 90% (360°)
- Supply voltage: 5 VDC +/-10%



### Electrical data HTP25K – singleturn, PWM output

Effective electrical angle of rotation 1.)	$7^{\circ} \leq \alpha \leq 360^{\circ}$ (programmable in factory), $\pm 0.5^{\circ}$
Independent linearity (best straight line) 1.)	$\pm 0.4\%$ @ $360^{\circ}$
Output signal	PWM (pulse width modulation)
Output signal voltage	5 V
Carrier frequency	244 Hz (constant)
Minimum duty cycle	10%, equal to app. 0.4 ms
Maximum duty cycle	90%, equal to app. 3.5 ms
Resolution	12 Bit
Supply voltage	5 V $\pm 10\%$
Power consumption (no load)	$\leq 10$ mA
Output load	$\geq 5$ kOhm
Insulation voltage 1.)	1000 VAC @ 50 Hz, 1 min
Insulation resistance 1.)	2 MOhm @ 500 VDC, 1 min
MTTF (SN29500-2005-1)	1267a

1.) According IEC 60393

### Function description PWM signal output HTP25K

The HTP25K provides a constant carrier frequency with 244 Hz at the signal output, with HIGH and LOW signal levels which have a constant signal amplitude. A constant carrier frequency means a constant length of the period duration. The duty cycle and thus the pulse width changes in dependency of the rotating angle between 10% to 90% relative to the signal period. If the CW option is selected, the duty cycle increases when turning clockwise. If the CCW option is selected, the duty cycle decreases when turning clockwise. Normally no signal conversion is required for further processing of the output signal, because many  $\mu$ Controllers already have an input for PWM signals.

## Absolute Encoders with Pulse Width Modulation (PWM)

## Series HTP25K

### Order Code HTP25K – singleturn, PWM output

Description	Selection: standard= <b>black/bold</b> , possible options= <i>grey/italic</i>				
<b>Series</b>	<b>HTP25K</b>				
<b>Supply voltage / output signal:</b> <b>VSUP=5 V (4.5 to 5.5 V) / OUT=5 V / 244 Hz / PWM 10-90%</b>	<b>5PWM</b>				
<b>Sense of rotation:</b> (when looking at the front) <b>Clockwise</b> <i>Counterclockwise</i>		<b>CW</b> <i>CCW</i>			
<b>Rotation angle* in [°]:</b> <b>360</b> <i>320</i> <i>270</i> <i>180</i> <i>90</i> <i>Custom rotation angle (≥7°, positive integer)</i>			<b>360</b> <i>320</i> <i>270</i> <i>180</i> <i>90</i> <i>XXX</i>		
<b>Electrical connection, cable length:</b> <b>1 m round cable, axial</b> <b>1 m round cable, radial</b> <b>Connector M8, axial</b> <b>Connector M8, radial</b> <i>Round cable, customer-specific cable length [X,XX m], axial</i> <i>Round cable, customer-specific cable length [X,XX m], radial</i>				<b>PG</b> <b>PGR</b> <b>M8</b> <b>M8R</b> <i>PGX,XX</i> <i>PGRX,XX</i>	
<b>Installation variant/drilling pattern:</b> <b>Variant S</b> (Pins for exact alignment optional and not included) <b>Variant P</b> (pins pre-installed on the rotary encoder for precise alignment)					<b>S</b> <b>P</b>

\* For details see page 29.

### Order example HTP25K – singleturn, PWM output


**Requirement:**  
VSUP=5 V / OUT=244 Hz, sense of rotation CW, rotation angle 360°, M8 connector

**Example for order code:**  
HTP25K 5PWM CW 360 M8

### Cable and pin assignment

Function	Option PG(R)	Option M8(R)
OUT	brown	Pin 3
VSUP	red	Pin 1
GND	black	Pin 4


### Connector M8 (R) – pin assignment for 3-pin connector



Pin-Numbering of socket connector in the encoder housing

The orientation of the connector relative to the encoder housing is not defined and differs from one encoder to the next. When using angled connectors in combination with axial outlet, the orientation of the cable outlet is thus not defined.

If you need a defined orientation of the cable outlet, please choose our housings with radial cable outlet and use straight mating connectors.



Orientation will vary when using angled connectors.


**For details on zero point definition and output programming see page 29.**



## Drawings

## Family HTx25K

### Drawings HTx25K – Versions for drilling pattern S, magnet positioning

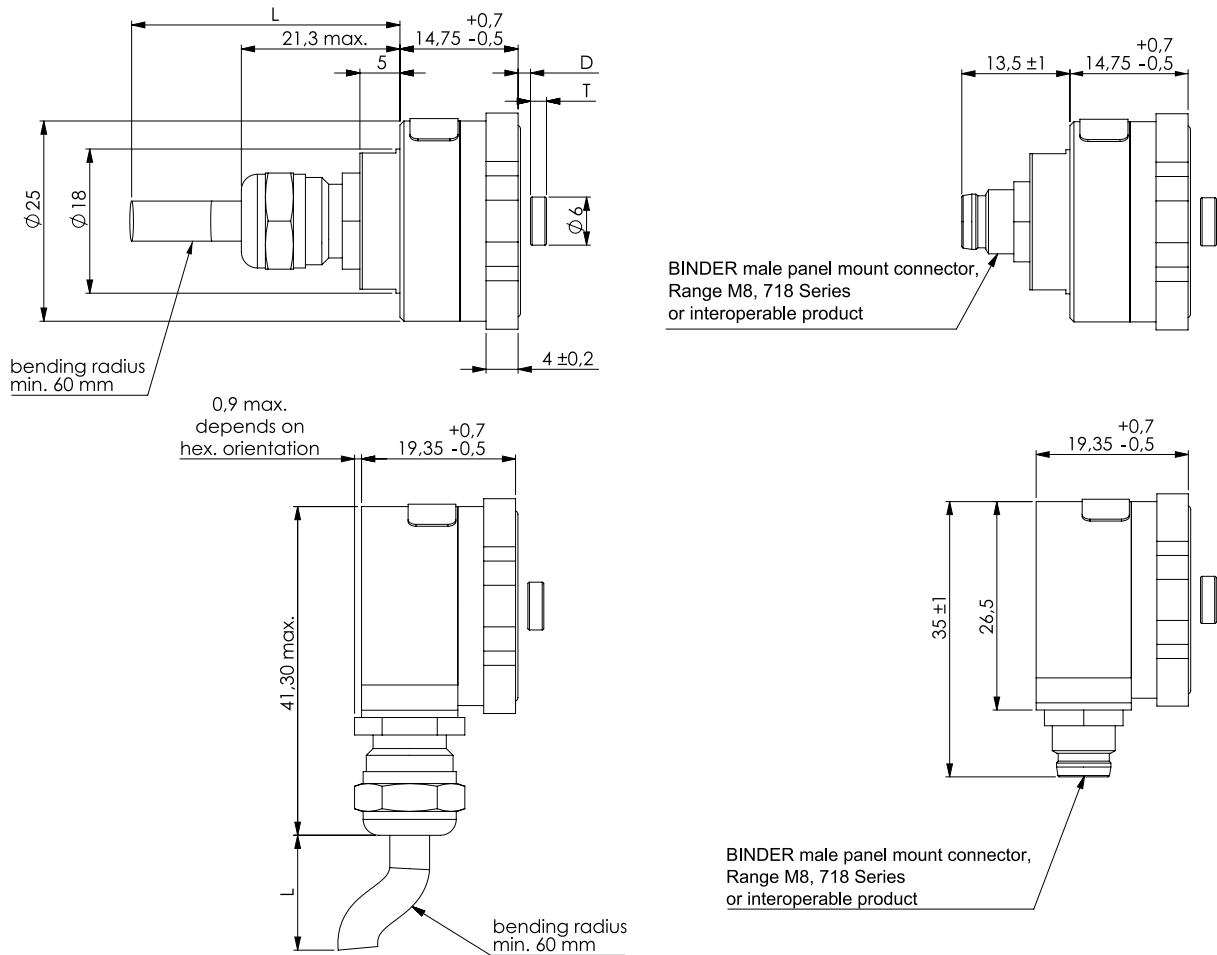

All dimensions in mm


### Magnet selection and positioning for enclosed standard NdFeB magnets

#### Important note:

The correct mounting distance D as well as the correct positioning of the in relation to the central axis to the housing surface of the kit encoder is mandatory for its correct function. The values below are not valid for other magnets (e. g. accessories).

Magnet thickness and distance from sensor surface		
Electronics	Thickness T of the magnet	Mounting distance D
Analogue singleturn not redundant, HTA25K, HTP25K, HTS25K (only SPI)	3 mm	1.50 +/- 0.15 mm
Serial, SPI, (HTS25K)	3 mm	1.50 +/- 0.15 mm
Serial, SSI, (HTS25K)	4 mm	0.50 +/- 0.15 mm
Analogue redundant, HTA25KX	2.5 mm	0.50 +/- 0.15 mm
Incremental, HTI25K	4 mm	0.50 +/- 0.15 mm
Analogue multi turn HTA25KPM	4 mm	1.00 +/- 0.15 mm

## Drawings HTx25K – Deviations for drilling pattern P

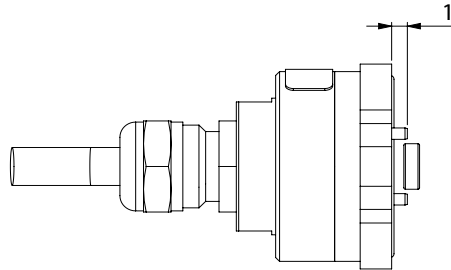


Pins/cylindrical pins are only pre-assembled if drilling hole pattern P is selected.  
Missing dimensions see drawings of the variants for hole pattern S.

## Drawings – Cable/connector exit direction for radial versions (M8R, PGR)

view shows cable orientation

view shows connector position

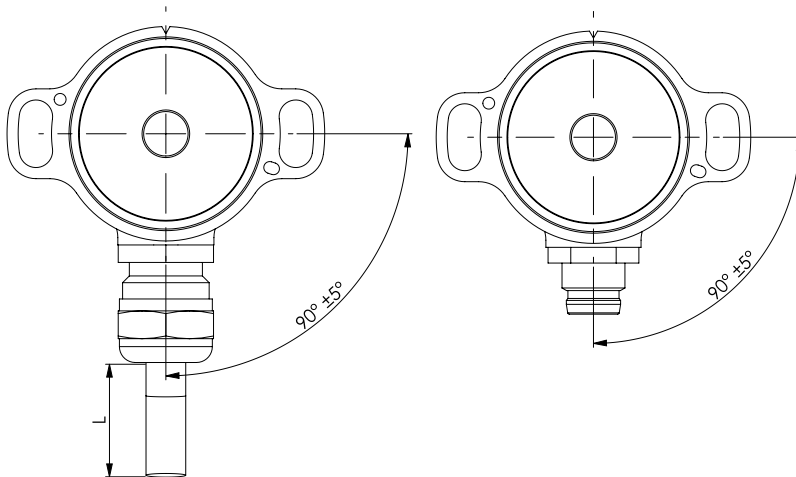

The orientation of the M8 connector pins relative to the encoder housing is not defined and differs from one encoder to the next. When using angled connectors in combination with axial outlet, the orientation of the cable outlet is thus not defined.

If you need a defined orientation of the cable outlet, please choose our housings with radial cable outlet and use straight mating connectors.

## Cable specs for option PG(R) (round control cable)

Option	Standard cable length L	Number of single strands (depends on electronics)	Cable sheath Ø or width	Single strands cross section	Allowed tolerance (L)	Minimum bending radius
PG PGR	Standard 1000 mm	3		AWG26	-20 mm to +40 mm	10 x D Ø (D = cable sheath diameter Ø)
		6				
		8				
		10		AWG28		
		12				

Cables delivered with cable shield

(\*) Tolerances according IPC Association

## Cable length tolerances – custom lengths

Length L	Tolerance
≤ 0.3 m	+25 mm / -20 mm
> 0.3 m - 1.5 m	+40 mm / -20 mm
> 1.5 m - 3 m	+100 mm / -40 mm
> 3 m - 7.5 m	+150 mm / -60 mm

Wire harness length measured from sensor face including connector. Minimum cable length: 0.08 m (for round cable). Please contact us for lengths > 3 m regarding handling and packaging.

## Mechanical and Environmental data

Mechanical angle of rotation 1.)	Endless
Lifetime 2.)	Mechanically unlimited
Max. operational speed	<p>The maximum actuation speed is not limited mechanically. The maximum permissible actuation speed [rev./min] is calculated in relation to the resolution. For absolute encoders:</p> $rev./min. (@max. resolution) = \frac{1}{2^{Resolution\ in\ Bit} * Updaterate\ in\ s} * 60s$ <p>For incremental encoders:</p> $Max. rev./min. = \frac{Limit\ Frequency\ \frac{1}{s} * 60s}{Number\ of\ Pulses}$
Operating temperature range	<p>Option M8 (connector)</p> <ul style="list-style-type: none"> <li>-30 to +80°C</li> </ul> <p>Option PG (cable gland incl. cable)</p> <ul style="list-style-type: none"> <li>-30 to +85°C cable fixed</li> <li>-10 to +85°C cable in movement</li> </ul>
Storage temperature range	-30 to +105°C
Protection grade (IEC 60529) front side	IP67
Protection grade (IEC 60529) rear side	<p>Option PG: IP68 (cable ends excluded)</p> <p>Option M8: IP67 (when mated with IP67 type M8 cable)</p>
Vibration (DIN EN 60068-2-64:2008 + A1: 2019)	±1.5 mm / 30 g / 10 to 2000 Hz / 16 frequency cycles (3x4 h)
Shock (DIN EN 60068-2-27)	400 m/s <sup>2</sup> / 6 ms / half sine (100±5) shocks
Housing diameter	Ø 25 mm
Housing depth	<p>In dependency to the electrical connection position:</p> <ul style="list-style-type: none"> <li>axial 28.25 mm (variant with M8 connector)</li> <li>radial 19.35 mm (variant with M8 connector)</li> </ul>
Shaft diameter	No limitation (customer side)
Mass (approx.)	<p>HTx25K with connector M8(R), 19 g</p> <p>HTx25K with cable gland and 1 m signal cable PG(R), 48 g</p>

1.) According IEC 60393


2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

## Immunity / Electrostatic Discharge

EN 61000-4-3 RF sine wave	Class A
EN 61000-4-6 Conducted sine wave	Class A
EN 61000-4-8 Power frequency magnetic fields	Class A
EN 61000-4-2 ESD	Class B


## Mechanical and environmental data, miscellaneous

Sensor mounting	<p>Standard mounting is done by using M4 screws. A rotation of <math>\pm 7.5^\circ</math> is possible to find the zero point in the application when installing the magnet.</p> <p>Alternatively, it is possible to align the rotary encoder exactly to the magnet using cylindrical pins (1.5 mm) in the application (a rotation is then not possible, however).</p> <p>There are two variants/two drilling patterns to choose from:</p> <ul style="list-style-type: none"> <li>Variant S (standard): Cylindrical pins are installed by the customer in the application and the rotary encoder is attached and fixed using M4 screws</li> <li>Variant P: Cylindrical pins are pre-installed on the rotary encoder. The drillings for the pins must be implemented on the mounting position in the application. This variant is suitable, for example, for mounting on thin sheet metal.</li> </ul>
Mounting hardware included	<p>none</p> <p>(Note: With hole pattern P, the cylinder pins are already fixed on the rotary encoder)</p>
Fastening torque per screw for fastening of the rotary encoder	<p><math>\leq 1.4 \text{ Nm}</math> (M4 screws, thread tensile strength class 5.6)</p> <p>For screw securing, the use of a medium-strength thread securing adhesive is recommended</p>
Material housing	Aluminium
Material cable gland (PG)	Stainless steel
Material connector M8	CuZn nickel-plated

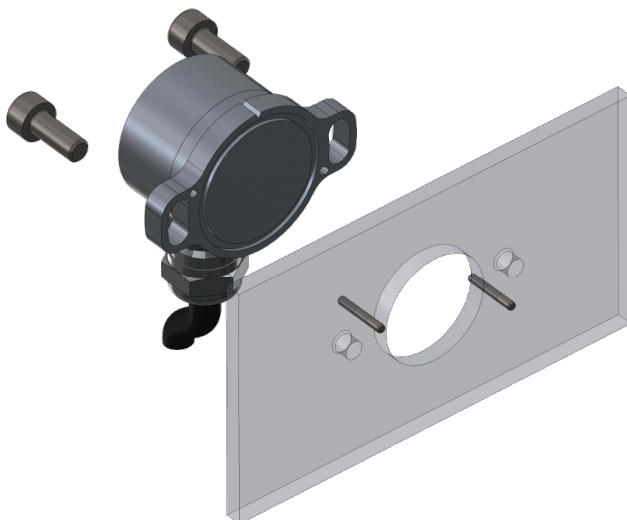

### Mounting example of the variant for drilling pattern S

Mount using 2 M4 screws, optional exact alignment using 2 cylindrical pins h8 1.5 (e.g. ISO 2338 B) (screws and pins not included)

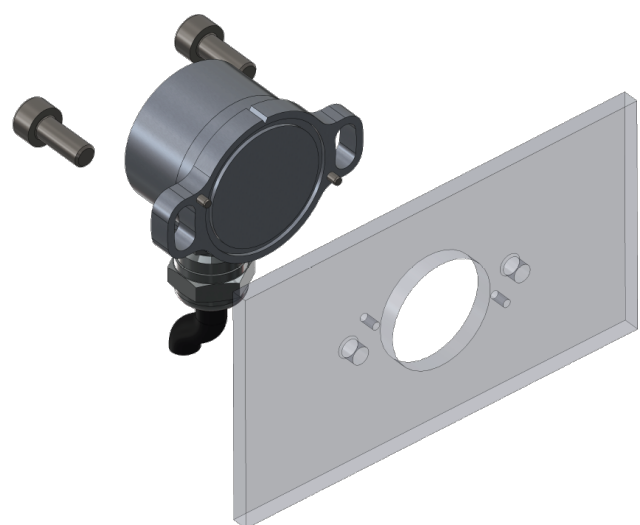

### Mounting example of the variant for drilling pattern P:

Mount using 2 M4 screws, exact alignment is ensured using cylindrical pins h8 1.5 pre-assembled at encoder (screws not included)

## Definition of the zero position

The supplied magnet has no marking, so the zero point cannot be set mechanically when installing this magnet. Please contact us if you need a solution with a mechanically defined zero point.

### Output at the zero point:


HTA25K (analogue outputs): Output signal 0% full scale (F. S.)

HTP25K (PWM output): duty cycle 10% (10% duty cycle)

HTS25K (serial output): Output signal 0% full scale (F. S.)

HTI25K (incremental output): The index signal is output (Z)

The direction of rotation is defined when looking at the flat front of the encoder:

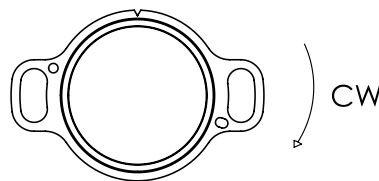

## Signal definition for custom rotation angles

Custom angles  $< 360^\circ$

When programming the electrical angle of rotation of  $< 360^\circ$ , the remaining non-effective range of rotation is divided equally into high and low.

